


→ buchas cônicas


sem flanges TL [Taper Lock]

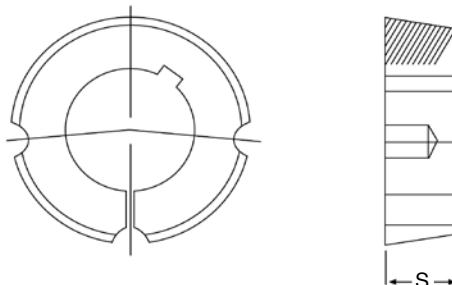

TIPO	Capacidade Torque N/M	S	Ø Furo		Parafuso
			Mínimo	Máximo	
1008	100	22,2	9,0	22,0	M6 x 12
1108	110	22,2	9,0	25,0	M6 x 12
1210	260	25,4	14,0	32,0	M10 x 16
1215	300	38,1	14,0	35,0	M10 x 16
1610	360	25,4	14,0	42,0	M10 x 16
1615	360	38,1	14,0	38,0	M10 x 16
2012	600	31,8	14,0	50,0	M10 x 20
2517	980	44,5	16,0	60,0	M12 x 25
2525	1000	63,5	16,0	60,0	M12 x 25
3020	2000	50,8	25,0	75,0	M16 x 30
3030	2000	76,2	35,0	75,0	M16 x 30

OBS.: Outros tipos sob consulta.

flangeadas QD

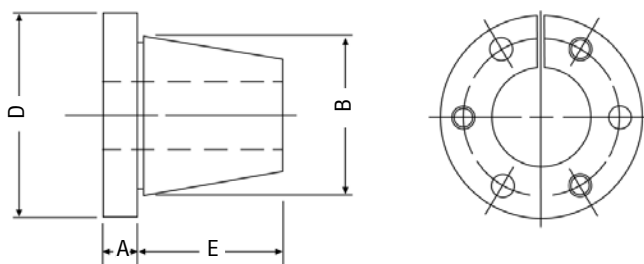

TIPO	CAPAC. torque N/M	A	B	D	E	L	Linha de centro parafuso	PARAFUSO SEXTAVADO		Ø Furos c/ chaveta	
								Dimensões	Qtde.	Mínima	Máxima
JA	112	8,0	35,0	51,0	17,4	25,4	42	M5 x 25	3	12	25,4
SH	395	9,5	47,5	68,0	22,0	31,5	57,2	M6 x 35	3	12	35,0
SDS	560	11,0	55,5	81,0	22,0	33,0	68,3	M6 x 55	3	12	42,0
SD	560	11,0	55,5	81,0	35,0	46,0	68,3	M6 x 55	3	12	42,0
SK	790	12,7	71,4	98,4	35,0	47,7	84,1	M8 x 50	3	16	55,0
SF	1240	12,7	79,4	117,5	38,0	50,7	98,5	M10 x 50	3	16	60,0
E	2250	19,0	97,4	152,4	47,0	66,0	127,0	M12 x 70	3	22	70,0
F	3380	20,5	112,7	168,0	71,5	92,0	142,9	M14 x 90	3	25	80,0
J	5075	25,4	130,7	185,0	88,6	114,0	158,7	M16 x 115	3	25	95,0
M	9590	31,7	165,1	232,0	139,8	171,5	200,0	M20 x 170	3	50	115,0
N	16930	44,5	177,8	254,0	168,0	206,0	216,0	M22 x 200	4	60	125,0
P	28200	50,8	209,6	298,5	193,5	238,0	254,0	M24 x 240	4	70	145,0
W	42320	80,0	265,0	381,0	238,2	289,0	323,8	M30 x 280	4	100	180,0
S	70540	82,5	308,0	451,0	317,5	400,0	381,0	M30 x 390	5	100	210,0

OBS.: Buchas em aço sob consulta.